

**TECHNICAL PROGRESS.
SERVICE EVOLUTION.**
Engineered since 1950.



velyen licensed by **ISTOBAL**
Automotive Lifting Quality



Net prices for distributors

Visit us at www.velyen.com

► **CATALOGUE ICONS**
LOOK UP THESE STAMPS
IN THE CATALOGUE



SAFETY REGULATIONS

Products homologated and certified according to the new European Directive 2006/42/CE and Harmonized Standards EN 1493:2010.



THE BEST CHOICE

- Search this label to find our more competitive products, high-range equipment for higher performance and satisfaction throughout their life.



BEST


- This icon indicates the best sellers

INDEX


AFTER-SALE & SPARES SERVICE



LUBRICATION EQUIPMENT



2-POST LIFTS



4-POST LIFTS



DOUBLE SCISSOR LIFTS



LONG PLATFORM SCISSOR LIFTS



COMMERCIAL VEHICLES LIFTS



ELEVADORES CARRETILLAS



MOBILE COLUMNS LIFTS




PARKING LIFTS



IN-GROUND PISTON LIFTS



MOTORBIKE & QUAD LIFTS



INSPECTION EQUIPMENT



TIRE EQUIPMENT



PRICE LIST PVP

► EXPORTS

**WE ARE A GLOBAL
COMPANY**

► EXPORTS

50%

A half of our production
is exported

► COUNTRIES

42

Velyen is present in more than 33
countries

► INTERNATIONAL SUBSIDIARIES

3

Subsidiaries in Argentina, Mexico
and United Kingdom



Velyen Automechanika

We can provide a complete service.

Stop wasting money on oil changes

Save money thanks to Velyen's management system



1,5 lifts x mechanic = 30% turnover




Increase an average of €125 per customer thanks to the active reception.



Workshops with no alignment machine lose money and customers for not giving a complete service.

Equipment repaid over 3 months.

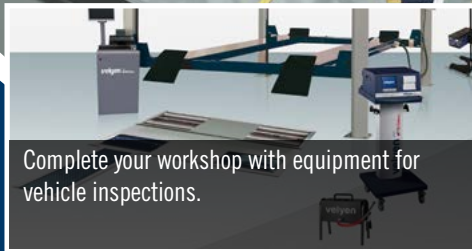

Complete your workshop with equipment for vehicle inspections.



Tire change.

Increase your profits offering an additional service.

► HOW TO EQUIP A COMPLETE WORKSHOP AT COMPETITIVE PRICES

Control your EXPENSES, with Premium equipment and little investment.



Profit

Equipment included in a weekly investment of €190

- 4 Premium lifts
- 1 Tire changer with helper arm (Run Flat)
- 1 wheel balancer
- 1 3D Aligner
- 3 Waste oil drainers
- 1 Mobile oil supply equipment
- 1 Mobile exhaust equipment

You can have all the products to equip a professional workshop at a predetermined and easy to monetize cost.

INVESTMENT
22.900€

RETAIL PRICE
30.000€



Automotive Lifting Quality

► DIFFERENT PRODUCT RANGES ACCORDING TO YOUR NEEDS

Istobal, Velyen's precedent as a specialist manufacturer since 1950.

Velyen designs and manufactures lifts and lube equipment.

Also sells OEM to equip a workshop with complete equipment such as mot bays, tire changers, wheel balancers, aligners, exhaust gas extraction, etc.

Velyen, manufacturer and aftersales reference in Spain.



Saving, a must.

Discover our solutions in vehicle lifts, assembled in Valencia, SPAIN, which meet the highest standards of current CE, the best price and a regular production .



► VelyenPremium

Latest design and technology

Take advantage of more than 60 years of experience in premium components and a high level of excellence and performance..



Manufacture Video





Did you know that you could save more than you imagined thanks to a lubrication management system?

Stop wasting money with the solutions offered by VELYEN:

- **Reduced purchasing costs**
- **Computerized control of each supply**
- **No more cans**
(+ savings + cleanliness)
- **Agility and speed**

AMORTIZATION OVER 15 DAYS

EXAMPLE OF CONSUMPTION

Option	Price / Litre	15,000 L/Year	40,000 L/Year
4L Can	3,50 €	52.500 €	140.000 €
1,000L Tank	2,70 €	40.500 €	108.000 €
SAVING		12.000 €	32.000 €


*Average oil price Top sellers

Find how in the following pages ►

TURNKEY INSTALLATION

Installation example, ask for a quote

To fulfill your needs

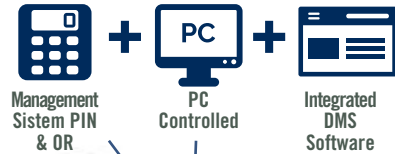

Oil Management System suitable for Autoline, Quiter and Espiga. Please ask for other systems.



WatchVideo



► 5010190

Suction / Drainer unit 90 litres

- Mobile equipment
- Tank capacity of 90 l.
- Pressure control valve
- Extraction capacity of 60 l.
- Tank drain is operated pneumatically.

Advantages:

- Quick suction
- Extraction of oil by gravity or suction
- Cleaner and more efficient collection
- **5010190/K: ...**



► 4LM0010

Mobile oil dispenser for 208 L tank, trolley, pump & digital gun

- Oil Pump 3:1.
- Tank Trolley.
- 4 m Hose.
- Digital Oil Gun.



► 4LM0050

Oil dispenser set for 1.000 L tank, open hose reel, anti-drip tray, pump & digital gun.

- Oil dispenser set with wall-bracket and 10 m hose reel for 1.000l tanks.
- Pneumatic pump 3:1 with air maintenance unit (manometer/lubricator with filter) SAE 240 digital gun, 1m air hose and 2x2 oil hoses.
- Maximum flow 22 l/min.



Know what the professionals think



Disadvantages narrow lifts




Advantages Velyen lifts



Advantages 4EC1800

velyen

OTHER BRANDS

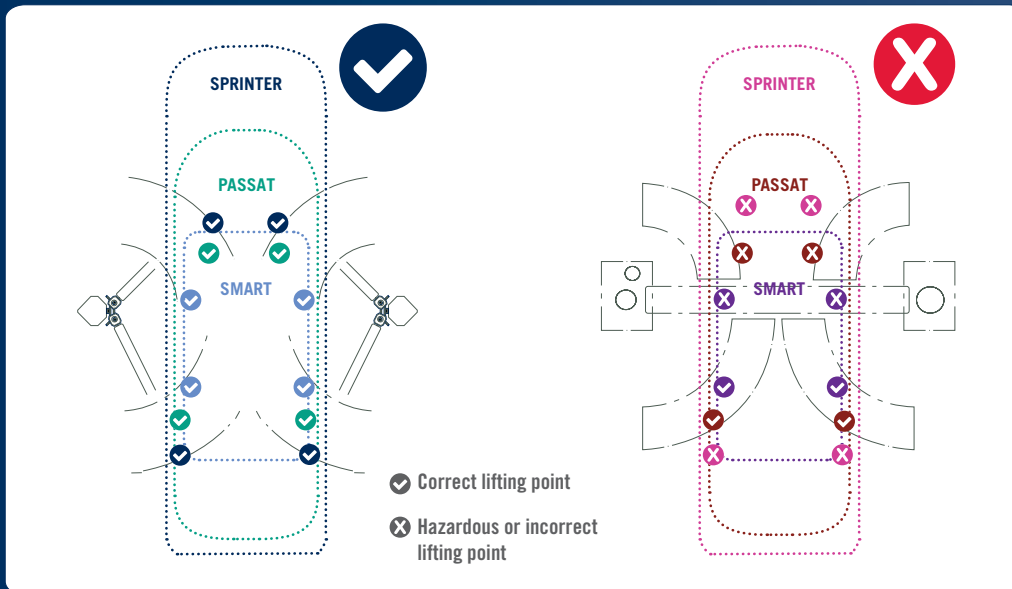

► 4EB1700: The new electromechanical lift with base

For decades electromechanical lifts have been the favourite lifts for those seeking a reliable and longlasting equipment in the workshop.

Originally launched in 1964 as the successor of Istobal 42700, the new 4EB1700 model is, no doubt, one of the most reliable lifts ever made.



ACCESSORIES FOR 2 POST-LIFTS 4EC1800 Y 4EB1700




► 4301000

SafetyPad



► 990800 / 990700

Pad 80 mm
Pad 130 mm



► 4303300

Total LED lighting



► 4302500 / 990200

ExpressPad Arms 4EB1700 / 4EC1800





► 4EC1800

SCS
TECHNOLOGY

Electromechanical 2-Post Lift Baseless 3500 Kg
Electronic Synchronization: Possibly the world's most versatile lift

TECHNICAL DATA

Width between columns	2795 mm
Load capacity	3500 Kg
Minimum height	95 mm
Lifting height	2000 mm
Lifting time	45"
Arm length (min-max)	Short 620-1240 mm Long 925-1440 mm
Overall width	3490 mm
Column + Overhead conduit height	4040 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2 x 2.4 KW

· Optional 925-1500 mm arms kit Mod.4300600



► 4EB1700



Electromechanical 2-Post Lift W/Base 3200 Kg

TECHNICAL DATA

Width between columns	2640 mm
Load capacity	3200 Kg
Minimum height	100 mm
Lifting height	1945/2000 mm
Lifting time	60"
Arm length (min-max)	Short 500-900 mm Long 800-1250 mm
Overall width	3335 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.4 KW

- Optional Single Phase 4EB1700/2 (2,8T)
- Optional 800-1250 mm arms kit





BEST SELLER



BEST SELLER



► 4EC1300



Hydraulic 2-Post Lift Baseless 4000 Kg Automatic

TECHNICAL DATA

Width between columns	2950 mm
Load capacity	4000 Kg
Minimum height	90 mm
Pad extensions height	100 mm
Lifting height	1900 mm
Crossbar height (ind. - out.)	3950-4085 mm
Lifting time	45"
Arm length (min-max)	740-1150 mm / 890-1390 mm
Overall width	3540 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

- Optional Single Phase 4EC1300/2
- Optional 890-1390 mm arms kit Ref. 4304400...



► 4EC1400



Hydraulic 2-Post Lift Baseless 5000 Kg Automatic

TECHNICAL DATA

Width between columns	3090 mm
Load capacity	5500 Kg
Minimum height	90 mm
Pad extensions height	90/160 mm
Lifting height	1900 mm
Crossbar height (ind. - out.)	4920-5050 mm
Lifting time	70"
Arm length (min-max)	900-1750-2050 mm
Overall width	3840 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW



► 4EB0900/K

Hydraulic 2-Post Lift With Semi-Base 3500 Kg
Manual unlocking

TECHNICAL DATA

Width between columns	2850 mm
Load capacity	3500 Kg
Minimum height	90 mm
Pad extensions height	90/140 mm
Lifting height	1930 mm
Lifting time	45"
Arm length (min-max)	740-1150 / 890-1390 mm
Overall width	3430 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

· Optional Single Phase 4EB0900/2K



► 4EB1000A

Hydraulic 2-Post Lift With Semi-Base 4000 Kg

TECHNICAL DATA

Width between columns	2850 mm
Load capacity	4000 Kg
Minimum height	90 mm
Pad extensions height	90/140 mm
Lifting height	1930 mm
Lifting time	45"
Arm length (min-max)	740-1150 / 890-1390 mm
Overall width	3430 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

· Optional Single Phase 4EB1000A/2

► **AFTER-SALE SERVICE AND SPARES PARTS**

DO YOU KNOW ALL THE ADVANTAGES OF VELYEN PARTS?



ADVANTAGE 1

**VELYEN spare parts
have lower price**

RETAIL PRICE 2015

GREASE

1556400 9,90 euros

001259 4,90 euros

PADS

0720300 11,60 euros

1304800 12,60 euros

007300 13,60 euros

MAIN AND SAFETY NUTS

0922700 150 euros

2782400 160 euros

LOCKING SYSTEMS

1347300 145 euros

0722500 100 euros



ADVANTAGE 2

**VELYEN spare parts are approved and
meet mandatory safety regulations**



ADVANTAGE 3

**VELYEN spares increase the life of
your equipment**



ADVANTAGE 4

**The supply of VELYEN spare parts
is guaranteed, even for older lifts**



Watch Video

► 4ED0300

► 4ED0400

► 4ED0600



Hydraulic 4-Post Lift 100% Automatic Release No compressed Air Required

TECHNICAL DATA	4ED0300	4ED0400 ☆	4ED0600 ☆
Load capacity	3500 Kg	4000 Kg	5000 Kg
Platform lengths	4370 mm	4450 mm	5230 mm
Platform widths	450 mm	560 mm	580 mm
Width between columns	2670 mm	2670 mm	2900 mm
Distance between platforms	800-1235 mm	690-1015 mm	800-1210 mm
Minimum height	190 mm	150 mm	150 mm
Lifting height	1700 mm	1700 mm	1800 mm
Lifting time	30"	30"	45"
Overall length	5380 mm	5150 mm	5950 mm
Overall width	3035 mm	3035 mm	3265 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW

· Optional Single Phase 4ED0300/2

· Optional Single Phase 4ED0400/2 / 4ED0600/2



► 4ED0400N



**Hydraulic 4-Post Lift 4000 Kg
Wider For 3D Alignment**

TECHNICAL DATA

· Optional Single Phase 4ED0400N/2

Load capacity	4000 Kg
Platform lengths	4450 mm
Platform widths	560 mm
Width between columns	2900 mm
Distance between platforms	690-1245 mm
Minimum height	150 mm
Lifting height	1800 mm
Lifting time	45"
Overall length	5150 mm
Overall width	3265 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

► 4ED1400



► 4ED1600



**Hydraulic 4-Post Lift 4000 Kg / 5000 Kg with recesses for
turning plates and play detector**


TECHNICAL DATA

	4ED1400	4ED1600
Load capacity	4000 Kg	5000 Kg
Platform lengths	4520 mm	5700 mm
Platform widths	560 mm	630 mm
Width between columns	2450 mm	2650 mm
Distance between platforms	655-850 mm	550-880 mm
Minimum height	150 mm	150 mm
Lifting height	1800 mm	1800 mm
Lifting time	45"	45"
Overall length	5320 mm	6470 mm
Overall width	2800 mm	3000 mm
Motor	Trifásico 230/400 V 50/60 Hz. 2.2 KW	

- MOT version (L) includes: play detector, turnplates, pedal depressor and mirrors
- Optional Single Phase 4ED1400/2 4ED1600/2
- Rear sliding platforms not included

ACCESSORIES WHEEL ALIGNMENT

Standard lift suitable also for wheel alignment thanks to optional accessories

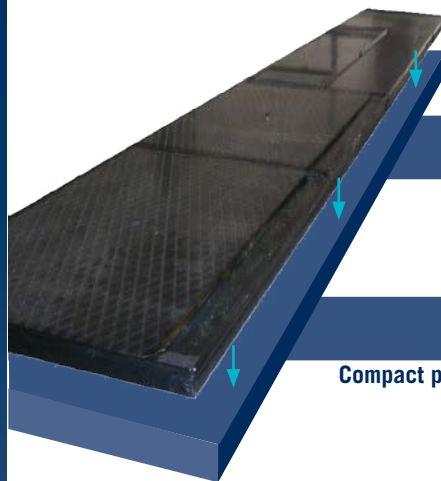


► 994900

Compact platform alignment
for 4ED0400 / 4ED0400N

► 999992

Compact platform alignment
for 4ED0600

► 1596100 x 2 unit



USABLE AREA
374x630x16 mm

Slimline platform 16mm for
4ED0300

► 4661600

USABLE AREA
374x630x45 mm

Non-integrated platform alignment
for 4ED0300

USABLE AREA
560x1620x45 mm


Non-integrated platform alignment
for 4ED0400 / 4ED0400N / 4ED0600

► 4249000* / 4249200** / 425100***

Jacking beam 2T for
*4ED0400 / 4ED0400N
**4ED0300 / 4ED0600
***4ED1400 / 4ED1600



LED Lighting Equipment



► 992201


Play detector
for 4ED1400 / 4ED1600



► 4661800

Freewheel platform for 4ED0600

► 4661900



4ED0600
OPTIONALS



► 4EE3000




TECHNICAL DATA

Hydraulic Lift	3000 Kg
Motor	2.2 kw
Max Voltage	AC 400 or 230V $\pm 5\%$
Max electricity	400V:5A / 230V:10A
Speed	1450 rpm/min
Lifting Time	+/-50 seg
Pump	4.3 cc
Continuos pressure	210 bar
Variable press	150~300 bar
Work temp	5-40°C
Bore humidity	30-95%
Noise	+/-79 db

Hidraulic Lift 3000 Kg for Painting Booth

Minimum Floor Requirements:

- Resistance in the anchorage area: 100N/cm²
- Concrete huckness: 150mm
- Concrete quality: B25

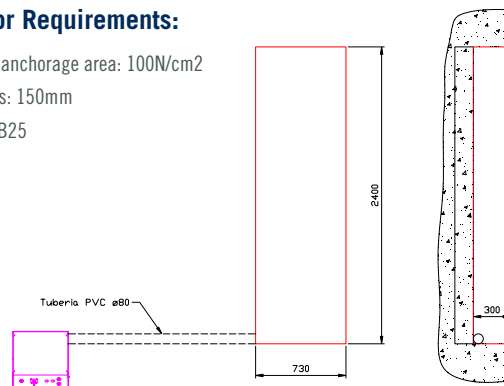

- Optional Atex Customization 4EE3000 (2.500Kg) ref. 4380000
- Optional Extensions 4EE3000 ref. 4380100



► 4EE1150/2



Double Scissor Lift 2800 Kg - Low Profile: 105 mm
Optional mobility

TECHNICAL DATA

Load capacity	2800 Kg.
Platform lengths	1420-2025 mm
Platform widths	460 mm
Minimum height	105 mm
Maximum lifting height	1000 mm
Distance between platforms	830 mm
Overall length	2025 mm
Overall width	1955 mm
Motor	Single Phase 230 V 50/60 Hz. 2.2 KW

- 4EE1150/2K:
- Mobility Kit 4EE1150/2K ref. 4662400:

► 4EE1300 / 4EE1400

Performs automatic bleeding in two easy steps

1



Press the UP button to raise both platforms at maximum height

2



Simultaneously press the UP button and the off-photocell button for 3 minutes to complete the purge of the hydraulic circuit



► 4EE1310

► 4EE1410



Double Scissor Lift 3500 Kg / 3200 Kg
Low Profile: 105 mm · Automatic Bleeding

TECHNICAL DATA

	4EE1310	4EE1410
Load capacity	3500 Kg.	3200 Kg.
Platform lengths	1420-2000 mm	1420-2000 mm
Platform widths	650 mm.	650 mm.
Minimum height	102 mm	102 mm
Maximum lifting height	1950 mm	1950 mm
Distance between platforms	770 mm	770 mm
Overall width	2070 mm.	2070 mm.
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW



**DIRECT
DESCENT.
IDEAL FOR
MOTOR
REPAIRS**

AUTO


- Optional Single Phase 4EE1310/2 y 4EE1410/2
- Optional in-ground installation ramp supplements ref. 992500: ...
- Standard pads 40cm - Pads as Option 70cm ref:4252400: ...



Did you know that accidents in workshops are above average and you can prevent them?

The main causes are:

- Failure to Prevent
- Lack of Training
- Lifts that do not meet current safety standards.

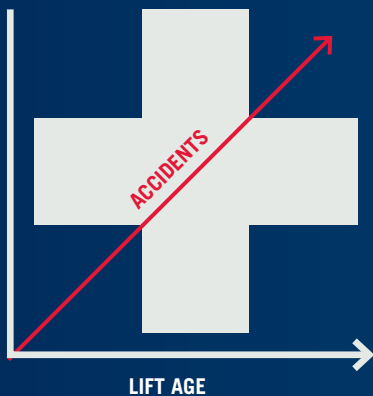

Solutions that Velyen offers:

- Maintenance service
- Continuing training
- Our products meet the new European Machinery Directive 2006/42/CE and Harmonized Standards EN 1493:2010





**Did you know that a workshop
with 1.5 lifts per technician have
a turnover of 30% higher
than the rest?**



Find out in the following pages ►



► 4EE0700H

► 4EE2400

► 4EE2600



High Raise Scissor Lift 4000 Kg / 4000 Kg / 5000 Kg

TECHNICAL DATA	4EE0700H	4EE2400*	4EE2600*
Load capacity	4000 Kg	4000 Kg	5000 Kg
Platform width	665 mm	665 mm	665 mm
Platform length	5030 mm	4500 mm	5030 mm
Distance between platforms	920 mm	820 mm	820 mm
Lifting Height	2160 mm	2160 mm	2160 mm
Platform design	Flat platforms	Sliding rear platforms and recesses for turning plates	Sliding rear platforms and recesses for turning plates
Minimum height	330 mm	330 mm	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW	3 Phase 230-400V 50/60 Hz. 2.2 KW	3 Phase 230-400V 50/60 Hz. 2.2 KW

· Optional Jacking Beam 2T

· *MOT version (L) includes: play detector, turnplates, pedal depressor and mirrors



► 4EE0535

► 4EE0545

Extra Slim Scissor Lift For Wheel Alignment 4000 Kg / 5000 Kg Free Wheels Service

TECHNICAL DATA

	4EE0535	4EE0545
Load capacity	4000 Kg	5000 Kg
Platform width	665 mm	660 mm
Platform length	4200 mm + 1180 mm rampa	5030 mm + 1180 mm rampa
Distance between platforms	800 mm	800 mm
Lifting Height	1880 mm	1880 mm
Minimum height	200 mm	200 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW	

AUXILIARY LIFT

Load capacity	3500 Kg	3500 Kg
Platform length	1450 mm	1450 mm
Platform width	610 mm	610 mm
Lifting height	450 mm	450 mm



► 4EE0505H

► 4EE0500H

► 4EE0600H



Scissor Lift For Wheel Alignment 4000 Kg / 5000 Kg Free Wheels Service

TECHNICAL DATA	4EE0505H	4EE0500H	4EE0600H
Load capacity	4000 Kg	4000 Kg	5000 Kg
Platform width	610 mm	620 mm	620 mm
Platform length	4500 mm	5030 mm	5030 mm
Distance between platforms	820 mm	920 mm	920 mm
Lifting Height	2160 mm	2160 mm	2160 mm
Minimum height	330 mm	330 mm	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW		3 Phase 230-400V 50/60 Hz. 5 KW

AUXILIARY LIFT

Load capacity	3500 Kg	3500 Kg	3500 Kg
Platform length	1400 mm	1630 mm	1630 mm
Platform width	570 mm	570 mm	570 mm
Lifting height	450 mm	450 mm	450 mm

- Optional ramps ref. 993600: ...

- Optional Single Phase 4EE0505H/2 4EE0500H/2



► 4ED0700N



► 4ED0800



Watch Video

Hydraulic 4-Post Lift 12000 Kg / 25000 Kg No compressed Air Required

TECHNICAL DATA	4ED0700N	4ED0800
Load capacity	12000 Kg	25000 Kg
Platform lengths	6220 mm	8000 mm
Platform widths	710 mm	810 mm
Width between columns	3265 mm	3500 mm
Distance between platforms	780-1150 mm	1000 mm
Minimum height	220 mm	240 mm
Lifting height	1660 mm	1540 mm
Lifting time	65"	90"
Overall length	7150 mm	9576 mm
Overall width	3735 mm	4269 mm
Motor	3 Phase 230/400 V 50/60 Hz. 3 KW	3 Phase 230/400 V 50 Hz. 5.5 KW



► 5251600

Oleoneumatic 10/7Tn
jacking beam for
4ED0700N

· Op. Total LED lighting ref. 4301700


► 5252000

Oleoneumatic 10/7Tn
jacking beam for
4ED0800

· Op. Total LED lightin ref. 4301800

· Op. platform extension 1,2m for 4ED0800 ref. 4303100



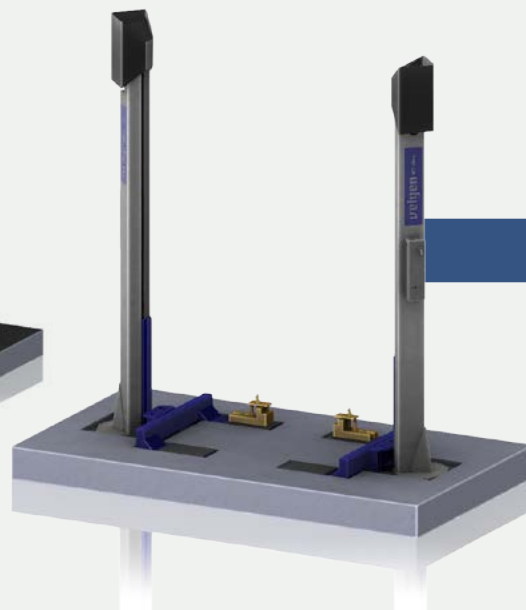

► ESP00264



TECHNICAL DATA	ESP00264
Load Capacity	2800 Kg
Lifting Height	2000 mm
Motor	2 x 2,4 KW
Standar Voltage	230-400 V
Tension	24 V
Lifting Time	45"
Net Weight	535 Kg
Overall Height	4040 mm
Distance Between Columns	2070 mm

2 Post Lift Special Forklifts for Logistics Depots

2 Post electrical lifts without a base suitable for oil change, greasing, wheel change, etc as well as any type of work under the vehicle, leaving the surface free of obstacles, wich allows the use of work benches and other tools for assembly & disassembly of forklifts.

· Opcional Clamps ref. ESP00232: ...



► 4EF0050

► 4EF0100

► 4EF0300



Watch Videos



OPTIONAL WIRELESS

Mobile Column Lift 5500 Kg. (Mod. 4EF0050 / 55) · 7500 Kg. (Mod. 4EF0100 / 200) · 8500 Kg. (Mod. 4EF0300 / 400)

- Electro-hydraulic columns.
- Lifting configurations:
 - 4-column set: 1 main + 3 slaves (Mod. 4EF050 / 4EF0100 / 4EF0300)
 - 6-column set: 1 main + 5 slaves (Mod. 4EF055 / 4EF0200 / 4EF0400)
 - Available till 8-column set
- Interconnecting cables from column to column around the vehicle in a cable circuit with one open end to drive in/out.
- Adjustable wheel forks from 380 to 620 mm.
- Each slave column is equipped with interconnecting cable with plugs at both ends.
- The control system "SCS" guarantee a perfect and smooth synchronization of the lifting columns without speed variations and a continuous monitoring of all functions.

- Optional wireless remote control.
- Individual hydraulic arm on each column permits an easy and quick position.
- Lifting columns can be operated separately or as a set.
- Safety system against obstacles.
- Mechanical upper limit stop to protect the piston travel.
- Flow valve to control the lowering speed.
- Safety valve against over-pressure..
- **Optional set 4 axle stands 7,5 Tn ref. 4662000: ...**
- **Optional set 4 axle stands 8,5 Tn: ...**
- **Optional wheel free cross beam ref. 4662100: ... Optional for forklifts: ...**
- **Mod. 4EF0055 ... / 4EF0200 ... / 4EF0400 ...**



MULTIPLY THE CAPACITY OF YOUR PARKING IN AN EASY, ECONOMIC AND FITTED TO YOUR NEEDS WAY.

Solve your problems of lack of space with the new range of Velyen parking lifts.

TECHNICAL DATA	4EP 2,7 Tn	4EP 2,3 Tn	4EP 2,0 Tn Flexible
Maximum lifting height (A)	3500 mm	3500 mm	1850 mm
Overall height Elevación (F)	2100 mm	2100 mm	1600 mm
Minimum height Elevación (F)	110 mm	110 mm	110 mm
Overall width (B)	2550 mm	2555 mm	2595 mm
Platform width (G)	2100 mm	2100 mm	2100 mm
WIDE entre columnas (E)	2385 mm	2385 mm	2495 mm
Long Total Plataforma (C)	4105 mm	4105 mm	3605 mm
Load Capacity	2700 Kgs.	2300 Kgs.	2000 Kgs.
Motor	230/400V. 2,2 Kw.	230/400V. 2,2 Kw.	230/400V. 1,5 Kw.
Column Sharing	YES	YES	NO
PRICES	-	-	-



Watch Video



► 4EM0110



Pneumatic Motorbike Lift 450 Kg

- Manual control of lowering speed.
- High quality cylinder operated with compressed air.
- Lifting time 3-8 sec.
- Lowering safety control system.
- Locking system at different heights.
- Safety chain for front wheel included.



► 4EM0300/2



Hydraulic Motorbike Lift 500 Kg

- Mobile equipment that can be easily displaced thanks to its support wheels.
- Manual lowering speed control.
- High quality hydraulic cylinder.
- Lifting speed 20 seconds.
- Lowering safety control system.
- Anchoring System at different heights included.
- Safety chain for the front wheel of the bike



Watch Video



► 4EM0400/2 MOT



Motorbike and Quad Lift MOT 600 Kg

- Solid and resistant platform up to 600 Kg.
- Sliding ramps for in-ground and surface installation.
- Lowering security system.
- Locking system at different heights.
- Corrugated anti-slipper ramps.
- Drilled platform for vehicle.
- Optional wheel locking.
- Highly stable platform.
- ON / OFF push button with emergency stop.
- Lowering acoustic warning

AND NOW OUR NEW RANGE OF IN-
GROUND PISTON LIFTS THANKS
TO OUR JOINT-VENTURE WITH
HERRMANN



velyen



MOT EQUIPMENT



- Velyen offers you the most complete range of MOT equipment manufactured in Spain according to the highest UK Standards



**DOWNLOAD
MOT BROCHURE**



MOT EQUIPMENT



- Results of investment on MOT.
Data from official workshops



30
VEHICLE
FAULTS

→

FAULTS

37% BRAKES

31% SUSPENSION

18% STEERING

► INVEST IN MOT BUSINESS



**DOWNLOAD
MOT BROCHURE**



► **4EE2500**



**Scissor Lift 4500 Kg MOT Special
with 1 front and 2 rear hydraulic detectors**

TECHNICAL DATA

Load capacity	4000 Kg
Platform width	620 mm
Platform length	5030 mm
Distance between platforms	920 mm
Lifting Height	2160 mm
Minimum height	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW



▶ 4RC0100



SPECIAL WHEEL HOLDERS



SPEED AND PRECISION FOR WHEEL ALIGNERS 4RC0100, 4RC0400 AND 4RC0400L
ref. 4306600: ...

Aligner CCD Radio 2.4 GHz

- Wireless radio Wheel Aligner for car and light commercial vehicles with computer and LCD 19".
- Movable use, independent of place.
- Rapidity and Flexibility Software
- Specially useful for multi-axle vehicles
- Quick measurement: Total Toe, Front camber and king pin, Caster, Front and Rear king pin, set back
- Compensation thrust (without using auxiliary lift)
- Tire size 12 " - 24"
- Vehicle width from 1.2 to 2.4 m
- Vehicle length from 1.8 to 4 m



Quick
Alignment
Software
3 min

▶ 4RC0400L



Portable Option
without cabinet
4RC0400LP



Watch Video

3D Wheel Aligner

- Height adjustment camera: equipped with a height controller that coordinates and adjusts the height of the camera to the optimum working position. 4RC0400L
- Automatic lifting with targets on wheels
- Vehicle data base with more than 20,000 vehicle data including American & European data.
- Multilanguage
- Two high resolution cameras at the beam ends.
- Level compensation system of high precision to correct any error due to level differences during elevation.
- User friendly and quick alignment in 4 steps (Pre-Alignment Inspection, Push-Pull Run-Out, Turn Left-Right and Alignment Results)
- High speed data processing with low power consumption.
- No electronics on wheels
- Suitable for high definition graphics
- Multiple Print Formats: Graphical Printout, Text Printout and Pre-Alignment Inspection Report.
- On-line correction mode helps operator to correct the alignment with easy 3 color bar code identification and 3D animated illustrations.
- Ability to customize logos and screens to increase the productivity.
- Rugged use targets (no glass, no electronics and corrosion resistant).
- Note: in case of breakage only replaces the last.
- Height Supplement
ref. 4304700/800/900: ...
- Optional for lifts on surface
ref. 4306100: ...
- Run flat claws ref. 4306000: ...
- Software database update: ...



► 4RA0505



Watch Video

Professional 3-Phase Automatic Tyre Changer Til 23"

- Equipment designed to work at the maximum output.
- Certified products according to European Directive 2006/42/CE.
- High quality components to guarantee a long-life and minimize maintenance and repair works
- Automatic Tyre Changer for passenger vehicle
- High resistance vertical column with AUTOMATIC back-ward movement
- Two speeds turntable and pneumatic tyre placing.
- **Professional automatic tyre changer with tubeless ref. 4RA0505I: ...**
- **Optional helparm for run-flat ref. 4800165/K: ...**
- **3-Phas 230V tyre changer available (4RA0505/5): ...**
- **1-PHASE 230V tyre changer available (4RA0505/2): ...**



► 4RB0051/2



Wheel Balancer Till 24"

- Manually Adding the geometric data of the wheel.
- High quality design.
- Certified products according to European Directive 2006/42/CE.
- High quality components to guarantee a long-life and minimize maintenance and repair works
- Activation and automatic brake release (not positioning)
- Automatic search of the right balanced position.
- ALU-P alloy wheels Programs
- Wheel Weight Capacity up to 65 kg.
- Tree diameter Ø36mm
- **Optional for wheels without central hole ref. 4803301: ...**
- **Optional cone Ø36 95-175 mm ref. 4803137: ...**
- **Optional motorbikes adapter ref.4803802: ...**



► 4RB0851A/2



Equilibradora Profesional Automática 28"

- Optimization program (look for the best coupling between rim and tire imbalance term values with noise reduction gear) .
- Program weight hidden (ALU-P - for subdividing the adhesive weight for the outside into two equivalent weights positioned behind the spokes of the rim).
- Activation and automatic brake release (not positioning)
- Wheel Weight Capacity up to 65 kg. Basic SCS included. Kit 3 cones included Ø40-158mm
- Automatic adding the geometric data of the wheel
- Tree diameter Ø40mm. Protection including wheel.
- Software generation. ALU-P alloy wheels Programs.
- **Opt. for wheels without central hole ref. 4803303: ...**
- **Optional cone Ø40 120-170 mm ref. 4803603: ...**
- **Optional motorbikes adapter 16 – 34mm ref. 4803803: ...**



PRICE LIST PVP

velyen ISTOBAL
Especialistas en Puestos • Equipamiento de taller

► AFTER-SALES SPECIALIST.
WORKSHOP EQUIPMENT

2016

RELIABLE AFTER-SALES SOLUTIONS

**PRICE LIST NR 16/001
YEAR 2.016**
From 1st February, 2.016

Price List 16/001.
Range 4E.

- LIFTS
- OPTIONAL ACCESSORIES
- NOT
- PARKING

Price List LIFTS

velyen

► AFTER-SALES SPECIALIST.
WORKSHOP EQUIPMENT

**PRICE LIST Nº 16/001
2.016**
From 1st February 2.016

Price List 16/001.
Range 4R.

- ALIGNMENT
- TYRE CHANGER
- WHEEL BALANCER
- OPTIONAL ACCESSORIES

Price List TIRE EQUIPMENT

velyen ISTOBAL
Especialistas en Puestos • Equipamiento de taller

► AFTER-SALES SPECIALIST.
WORKSHOP EQUIPMENT

**PRICE LIST LUBE EQUIPMENT Nº 16/001
YEAR 2.016**
From 1st February 2.016

RELIABLE AFTER SALES SOLUTIONS

Price List LUBRICATION EQUIPMENT

velyen

► AFTER-SALES SPECIALIST.
WORKSHOP EQUIPMENT

**PRICE LIST Nº 16/001
YEAR 2.016**
From 1st February 2.016

RELIABLE AFTER SALES SOLUTIONS

RANGE 4G
EXHAUST EXTRACTION:

- Spring Driven Hose Reels
- Exhaust Extraction Systems
- Exhaust Extraction Units

7 ANOS
5 ANOS

Price List EXHAUST EXTRACTION



ISO 9001

BUREAU VERITAS
Certification



SPAIN

Parque Industrial Ciudad de Carlet
C/ Camino del Carrasqueral, Nº 6
46240 Carlet - Valencia (SPAIN)
T(+34)962543073 **Fx**(+34)962543074
EMAIL comercial-sat@velyen.com

UK

PO Box 1032
Wroxham · Norwich · NR12 8WH
P 01603 781999 · **M** 07971 836680
Fax 01603 889009
EMAIL export.a@velyen.com

MÉXICO

Boulevard Córdoba - Fortín Km 335
94540 Córdoba - Veracruz (México)
T (+52) 2717165599
EMAIL director@velyen.com.mx

ARGENTINA

Arturo Orgaz 1170
Villa Paez CP 5003
Córdoba (Argentina)
T (+54) 351 3379290
T (0351) 489 0900 int 118
EMAIL export.c@velyen.com